

DURA BUILD CARE PVT. LTD.



AN ISO 9001 : 2008 COMPANY

“Quality, Integrity Assured.”

DURAMOL

Mould Release Agent /OIL

Description:

DURAMOL is one of the best quality, ready to use formwork/ mould release oil/agents. High quality surface finish is assured. **DURAMOL** is a blend of natural organic chemicals which provide a waterproof film to prevent adhesion of concrete over formworks and thus helps for easy and quick release.

Uses:

On steel, plastic and wooden formwork, for clean release. Facilitates removal and cleaning of shutters. Number of lifts of shutter is substantially increased.

Features:


- ❖ Best quality shutter / formwork release agent.
- ❖ Quick drying (1 to 2 hours) not affected by rain after application.
- ❖ Rust preventing coating on steel formwork.
- ❖ Waterproof repellent film on wooden formwork.
- ❖ Blow-holes, staining and surface blemishes reduced to minimum.
- ❖ Easy to apply high quality surface finish of white or grey concrete surfaces.
- ❖ Life of shutter or formwork increases.

Application:

DURAMOL is a ready to use product and should be applied in a thin and even coat preferably by spray. Unsealed new wooden formwork should be given a seal coat and then a final coat prior to placing concrete. Any excess material over formwork should be wiped of, otherwise thick application leads to surface dusting. Spray application is always advisable for thin application and higher coverage. Sponge rubber or clean cotton waste may also do but lower coverage will result. Protect the **DURAMOL** applied surface from rain for at least 1 to 2 hours from the time of application.

Technical Data:

From	:	Brown liquid
S. G.	:	0.87 ± 0.02
Flash Point	:	55°C
Coverage	:	Plastic/Steel surface : 40 to 60 m ² / Ltr. Wooden surface : 20 to 30 m ² /Ltr.
Shelf Life	:	18 months if unopened.
Storage	:	Keep it in a cool place and prevent it from Extremes of heat.
Packing	:	25 Ltr & 200 Ltr Containers.
Health & Safety	:	Flammable liquid, keep it away from naked Flame and spark. Do not smoke while using It is Non- toxic.

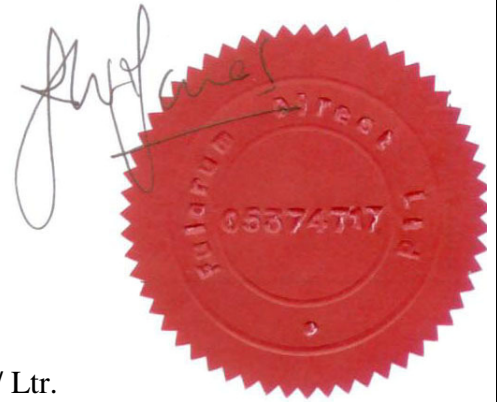

DURAMOL E Emulsifiable concentrated economical mould release agent. 1 ltr of **DURAMOL E** may be diluted with 5 ltr. Of potable water to get milky white solution. The same may be used within 48 hours on wood formwork only. Similar properties may exhibited as stated in details of our **DURAMOL**.

IMPORTANT: Though the product may change with some code as suffix or addendum to the principal or original name out of some minor adjustment and fine tuning in the formulation due to our continuous research and development but shall exhibit the stated properties with more improvement.

WARRANTY: Our high potency products are manufactured under stringent National/International Quality Standard specifications and guaranteed against any manufacturing defect. Suggestions and recommendations are made here based on our most practical experience and exposure over 25 years in the field and are believed to be most appropriate and correct BUT no liability can be accepted by us, as the conditions of use of such products are beyond our control.

HEAD OFFICE: 104-106, Dimension Deepti Plaza, Plot No-3, LSC, Pocket-6, Nasirpur, Dwarka, New Delhi-110045.

Phone No.: 011-25050236, 011-25050237, Fax No.: 011-25050238

E-mail: admin@durabuildcare.com, sales@durabuildcare.com, Website: durabuildcare.com