



DURAXYPUTTY - TE

Two Pack System Tar Based Epoxy Sealing Compound

Description :

DURAXYPUTTY TE is a two pack system tar based epoxy joint / gap sealing compound. It is used in filling pipe, tile joints / gaps filler.

Uses :

DURAXYPUTTY TE is basically used to provide smooth waterproof hard wearing pipe tile joints matching environment of pipe, tile. It is used in domestic floor and wall tiles, pipes and also in other areas like commercial establishment; laboratories super markets, showrooms, hospitals hotels, restaurants etc. This material could also be used as Epoxy Putty.

Features :

- Pack-A off white and Pack-B black colour of mixed material is uniform black. Easy to use and clean.
- Highly waterproof.
- Epoxy Based – non dusting / Non sag / abrasion.
- Excellent bonding, compressive and tensile strength ensure care free joints upto the life of pipes, tiles.
- Resistant to chemical attack.
- High quality product under rigid quality control system.
- Non shrinkage after hardening.
- Excellent adhesion to the most building materials.


Application :

Mix 1 part of Pack- A with 1 part of Pack -B of **DURAXYPUTTY TE** by weight and mix and knead further to a smooth putty consistency and then use it.

Apply the putty to the pipes tiles joints / gaps with spatula / small trowel and remove the surplus putty with a dry cloth/ sponge. Allow the filled putty up to 24 hours to dry & cure.

Technical Data :

Colour	: Pack - A off white, Pack - B black, mixed (A+ B) material black
Mixing ratio	: Pack – A : Pack – B = 1 : 1
Mixed Density (A+ B)	: 2480 Kg / m ³
Consumption per 1 mm thickness/m ²	: 2.5 Kg. (approx.)
Usable life at 30°C & 60% RH	: 30 minutes
Application Temperature	: Min.5°C & Maxi. 45°C
Typical Compressive Strength,Kg/cm ²	
1 day :	650
3 days :	750
7 days :	790
Shelf Life	: 12 months if unopened
Packing	: In 4 Kg, 20Kg, 50 kg, 100 Kg. Metal Cont.
Storage	: Store in a cool and dry place.
Health & Safety	: Non-toxic. Non- flammable

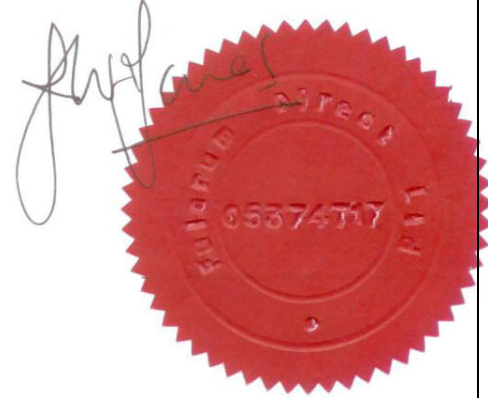

IMPORTANT: Though the product may change with some code as suffix or addendum to the principal or original name out of some minor adjustment and fine tuning in the formulation due to our continuous research and development but shall exhibit the stated properties with more improvement.

WARRANTY: Our high potency products are manufactured under stringent National/International Quality Standard specifications and guaranteed against any manufacturing defect. Suggestions and recommendations are made here based on our most practical experience and exposure over 25 years in the field and are believed to be most appropriate and correct BUT no liability can be accepted by us, as the conditions of use of such products are beyond our control.

HEAD OFFICE: 104-106, Dimension Deepti Plaza, Plot No-3, LSC, Pocket-6, Nasirpur, Dwarka, New Delhi-110045.

Phone No.: 011-25050236, 011-25050237, Fax No.: 011-25050238

E-mail: admin@durabuildcare.com, sales@durabuildcare.com, Website: durabuildcare.com