



DURAFLOORHARD

Liquid Floor Hardener and Dustproof

Description:

DuraflorHard is a clear liquid, which is a ready-to-use product for hardening and dust proofing of floors.

Uses:

DuraflorHard is used for both new and old concrete floors.

Recommended areas of usage:

- High performance areas subjected to forklifts i.e Warehouses, Manufacturing plants, food processing plants, bottling plants, freezer facilities, grocery stores etc.
- Floors subjected to heavy pedestrian traffic i.e: Hospitals, Airports, Stadiums, Schools, grocery stores etc

Features:

- o Hardens dustproof and seals porous floors.
- o Penetrates surface and is chemically converted into layer of hard, wear resistant particles.
- o Older the floor during uses, shining appears to emerge.

Application:

New concrete floors:

Floors must be thoroughly cured for a minimum of 14 days, dry and free from dust so as to readily absorb the hardening fluid.

Remove all traces of membrane curing film if present, using power brush equipment wherever possible.

Remove any oil, grease or other substances from concrete surface using detergent or other suitable method. Allow the floors to dry thoroughly afterwards at least 24 hours.

Apply first coat by spreading evenly with brush on the concrete surface. Allow to dry for 24 hours.

Check for any accumulation of surplus hardeners on low lying spots. Scrub these areas with a stiff brush and hot water, if necessary to remove any white deposit.

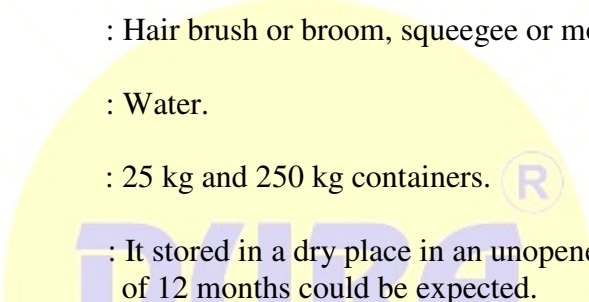
Apply second coat with brush and allow to drying for 24 hours before subjecting floor to normal use.

A third coat may be applied if the floor is found to be highly porous. Here also allow to dry for 24 hours.

Old or porous concrete floors:

Following the directions as for new concrete floors, but use three coat application.

Technical data:

Physical appearance	: Clear Liquid.
Specific Gravity at 30°C	: 1.20 ± 0.02
Coverage (typically)	: 2 coat treatment: 8 to 10 M ² per kg. 3 coat treatment: 5 to 6 M ² per kg.
Drying	: Allow 24 hours drying per coat before over coating or placing floor into service.
Health & Safety	: Non-toxic and non-flammable.
Flash point	: Aqua based product – not applicable.
Application Equipment	: Hair brush or broom, squeegee or mop.
Cleaning	: Water.
Packing	: 25 kg and 250 kg containers. 
Storage	: It stored in a dry place in an unopened container. Shelf life of 12 months could be expected.



IMPORTANT: Though the product may change with some code as suffix or addendum to the principal or original name out of some minor adjustment and fine tuning in the formulation due to our continuous research and development but shall exhibit the stated properties with more improvement.

WARRANTY: Our high potency products are manufactured under stringent National/International Quality Standard specifications and guaranteed against any manufacturing defect. Suggestions and recommendations are made here based on our most practical experience and exposure over 25 years in the field and are believed to be most appropriate and correct BUT no liability can be accepted by us, as the conditions of use of such products are beyond our control.

HEAD OFFICE: 104-106, Dimension Deepti Plaza, Plot No-3, LSC, Pocket-6, Nasirpur, Dwarka, New Delhi-110045.

Phone No.: 011-25050236, 011-25050237, Fax No.: 011-25050238

E-mail: admin@durabuildcare.com, sales@durabuildcare.com, Website: durabuildcare.com